


D-I marine Transmission DMT Series

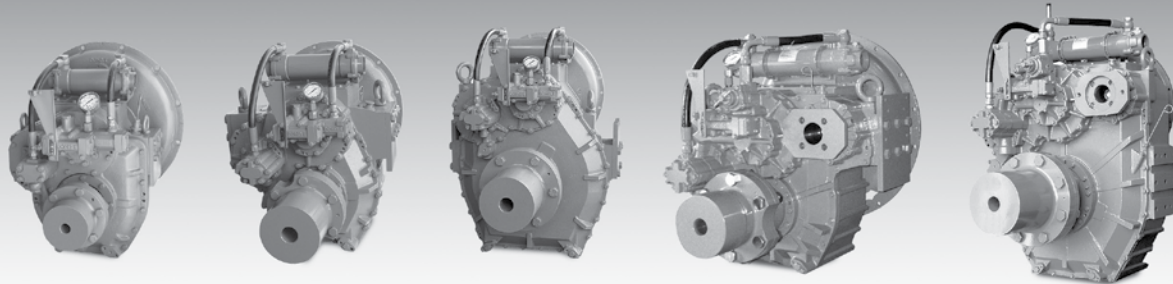

MODEL NAME	Reduction Ratio	Max. Input (rpm)	Max. Input Torque (kgf · m)	Output Capacity (HP)			Dry weight (kg)	Standard Housing	
				1800rpm	2100rpm	2400rpm			
DMT 25AL	1.64, 2.17, 2.52, 3.13, 3.32	2500	30	75	88	101	77	3, 4, 5	
DMT 50A	1.61, 2.06, 2.45 2.82, 3.12, 3.46	3500	55	138	161	184	143	1, 2, 3	
DMT 70T	1.61, 2.06, 2.45 2.82, 3.12, 3.46		87	220	257	293	162	1, 2, 3	
DMT 100T	1.61, 2.06, 2.45, 2.82		97	244	285	325	164	1, 2, 3	
DMT 100HL	4.07,4.50, 4.95		89	224	261	298	263	1, 2, 3	
	5.29 5.95		86 75	218 190	254 221	290 253			
DMT 110A	1.77, 2.09, 2.42, 2.82, 3.19, 3.81	2800	110	276	323	369	212	1, 2, 3	
DMT 135HL	4.07		130	329	384	438	293	1, 2, 3	
	4.50		125	315	367	420			
	4.95		115	291	339	388			
DMT 140H	1.97, 2.57, 3.03, 3.46		130	327	381	436	218	1, 2, 3	
				1600rpm	1800rpm	2100rpm			
DMT 150H	1.83, 2.09, 2.51, 3.08, 3.43	2500	168	375	422	493	287	1, 2	
DMT 170HL	4.04, 4.48		168	375	422	493	352	1, 2	
DMT 180HL	5.15, 5.96		168	375	422	493	475	1, 2	
DMT 200H	1.83, 2.09, 2.51, 3.08, 3.43		200	447	503	586	310	1, 2	
DMT 200HL	4.04, 4.48		200	447	503	586	370	1, 2	
DMT 240H	1.50, 1.97, 2.44, 2.93, 3.40		219	489	550	642	400	1, 2	
DMT 260H	2.06, 2.50, 2.92, 3.26		259	578	650	758	490	0, 1	
	3.53, 4.48, 4.52		259	578	650	758	640	0, 1	
DMT 260HL	5.04		239	553	600	700			
DMT 280H	2.06, 2.50, 2.92, 3.26		298	667	750	875	510	0, 1	
DMTP5100	1.47, 1.76, 1.93	168	375	422	493	270	1, 2, 3		
	2.48, 3.08	150	335	377	440				
	3.46	130	290	326	381				
DMTP6500	5.11, 5.62, 5.91, 6.57, 6.95	2400	259 239	578 533	650 600	758 700	850	0, 1	
	3.56 4.13 4.59	2300	298 292 286	666 653 640	750 735 720	875 857 840	700	0, 1	
DMT 400H	1.43, 1.72, 2.03, 2.46 2.75		453 403 354	1,013 902 791	1,140 1,015 890	1,330 1,184 1,038	660	0, 1	
	DMT 550H		1.43, 1.72, 2.03 2.46 2.75	557 517 443	1244 1154 989	1400 1300 1115	1633 1515 1298	695	0, 1
						1400rpm	1600rpm	1800rpm	
DMT 400HL	3.02, 3.28, 3.56, 4.07 4.48, 4.95		2300	453 374	887 731	1013 836	1140 940	750	0, 1
	DMT 550HL	3.02, 3.28, 3.56, 4.07 4.48 4.95		550 532 479	1075 1041 938	1229 1190 1072	1383 1339 1206	830	0, 1